


P 数	尺 寸	
	A	B
2	1.0	4.5
3	2.0	5.5
4	3.0	6.5
5	4.0	7.5
6	5.0	8.5
7	6.0	9.5
8	7.0	10.5
9	8.0	11.5
10	9.0	12.5
11	10.0	13.5
12	11.0	14.5
13	12.0	15.5
14	13.0	16.5
15	14.0	17.5
16	15.0	18.5
17	16.0	19.5
18	17.0	20.5
19	18.0	21.5
20	19.0	22.5

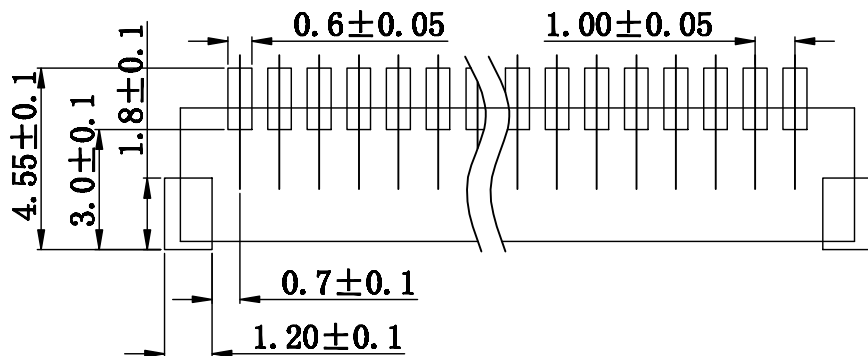

P. C. B LAYOUT

Material:
 Insulation:LCP
 Terminal: Phosphor bronze
 Specifications:
 Current rating: 0.5A AC, DC
 Voltage rating: 50V AC, DC
 Insulation resistance: 500MΩmin
 Withstanding voltage: 200V AC/minute
 Temperature range: -25℃ ~ +85℃

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD
CHECKED:	DATE:	
DRAWN: LYF		TITLE: SH1.0-XP SMT 立贴
DATE: 2018-09-03		CLIENT P/N /
UNIT	mm	SCALE free
FILE NO.	Ckmtw-SH1.0-0005	REV. A JLX0