
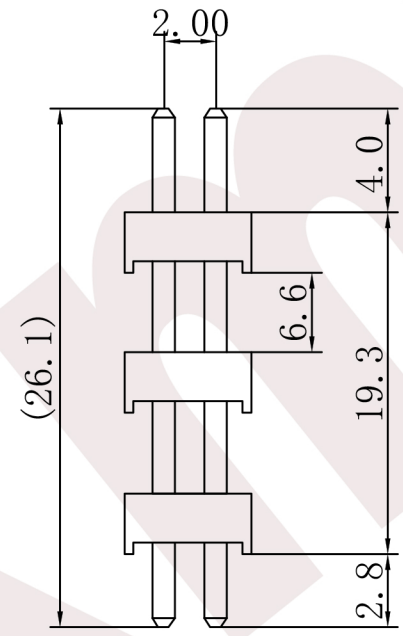


标记	版次	变 更 内 容	日期
	A版	新版图面	10-12-16
△	B版	双塑更改为三层塑胶	11-04-02

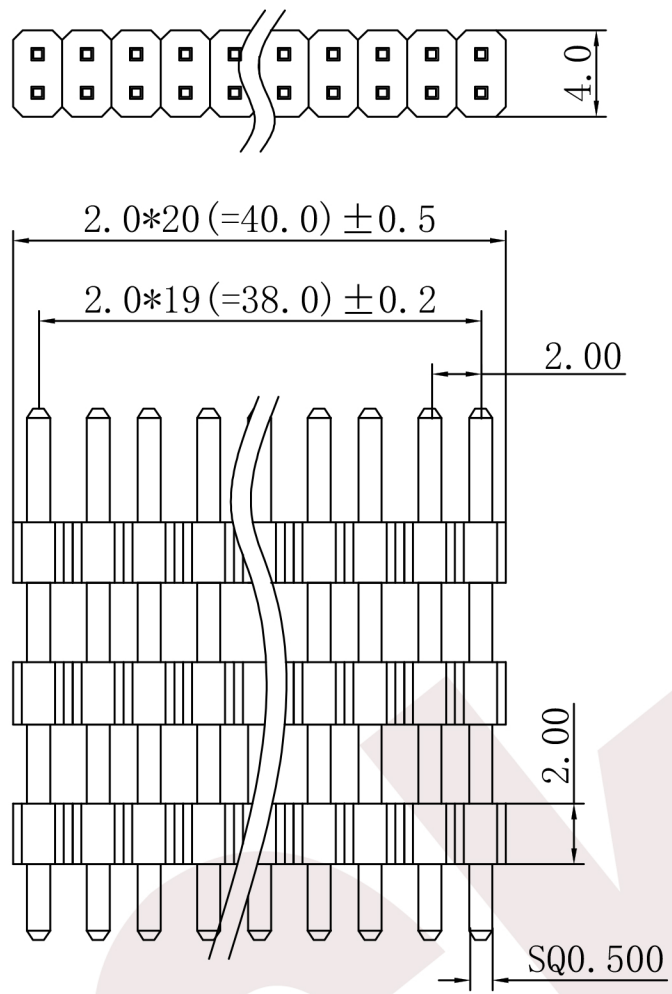

**Specification**  
 Insulator Material: Polysetr,UL94V-0  
 Standard:PA6T  
 Contact Material: Brass  
 Current Rating : 1.5Amp  
 Contact Resistance:20 Milliohms Max  
 Insulation Resistance : 1000MΩ Min.  
 Dielectric withstanding Voltage:AC 500V  
 Operation Temperature : -40℃ -- +105℃

注意:产品包装须用吸塑盒包装.

APPROVED:	DATE:	C <sub>kmtw</sub> 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO., LTD			
CHECKED:	DATE:	TITLE: 210-2S-2*20P 三塑 L=26.1MM			
DRAWN: LYF	DATE: 2011-04-02	CLIENT P/N	R30040580		
		UNIT	mm	SCALE	free
		FILE NO.	S007200230		REV.

.0	±0.20
.00	±0.10
.000	±0.05